BLINK 2026 · SITE 1.1

ROYAL DOG MURAL

PROJECTOR STUDY

04/25/2026

OVERVIEW

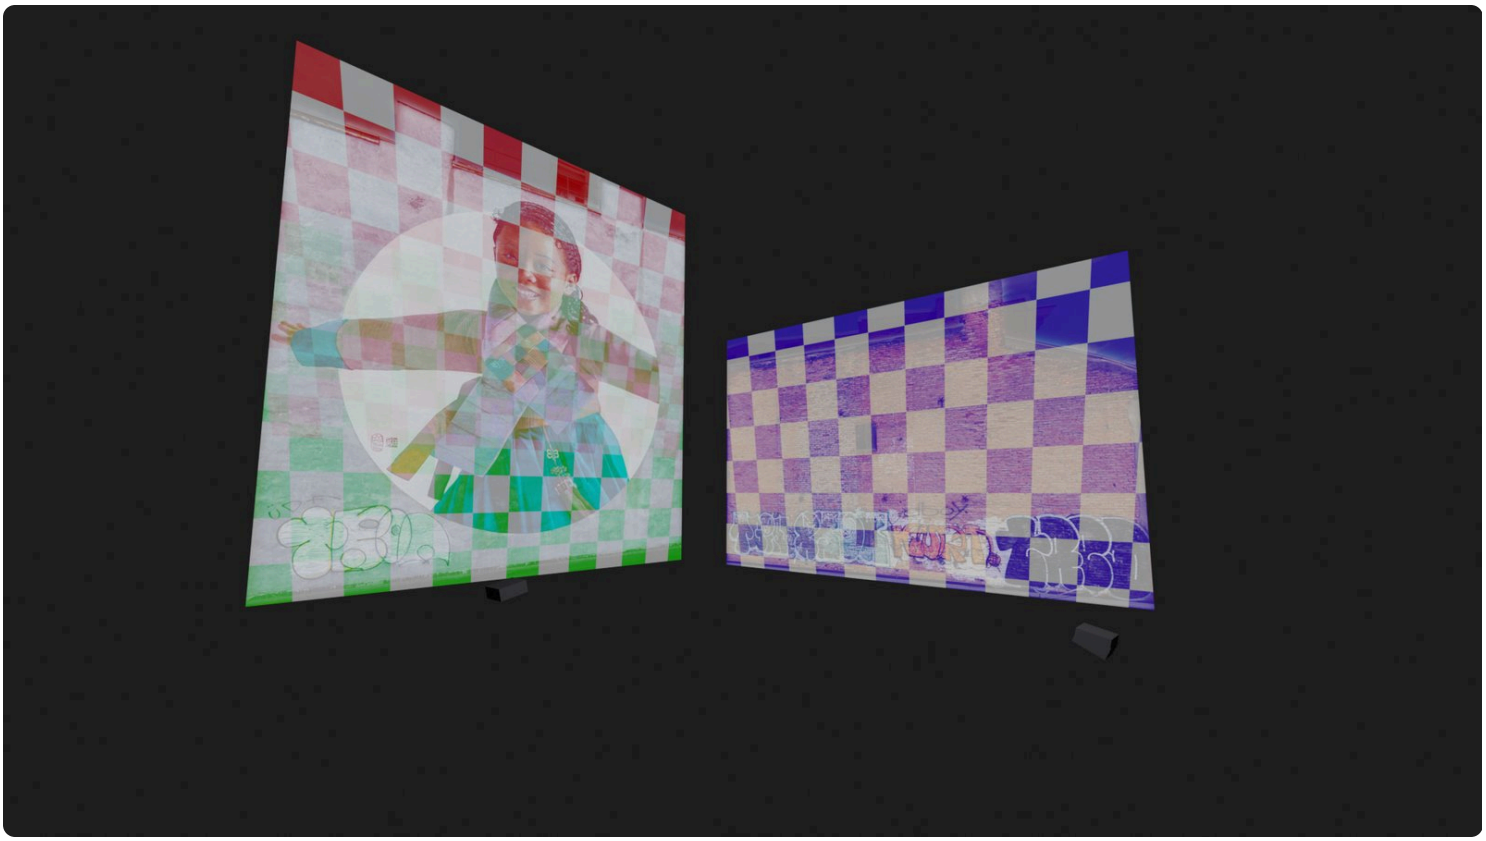

EQUIPMENT

PROJECTOR	LENS	LENS	SERVER
×3	×2	×1	GX1
Epson Pro L25000	ELPLW08	ELPLW05	

SURFACES

SURFACE	WALL SIZE	FROM GROUND	COVERAGE	AVG LUM.	RESOLUTION	PROJECTORS
Left	42'-0" × 44'-0"	13'-0"	49'-0" × 45'-0"	14 fc	2000 × 2090 px	PJ-1.1.1 PJ-1.1.2
Right	41'-0" × 26'-0"	13'-0"	43'-7" × 27'-3"	13 fc	1786 × 1260 px	PJ-1.1.3

LEFT

DIMENSIONS

BUILDING	
WIDTH	42'-0"
HEIGHT	44'-0"
FROM GROUND	13'-0"

COVERAGE	
WIDTH	49'-0"
HEIGHT	45'-0"
AVG LUMINANCE	14 fc

RESOLUTION	
RESOLUTION	2000 × 2090 px

ROUGH COVERAGE

OVERLAP ZONES

LUMINANCE HEATMAP

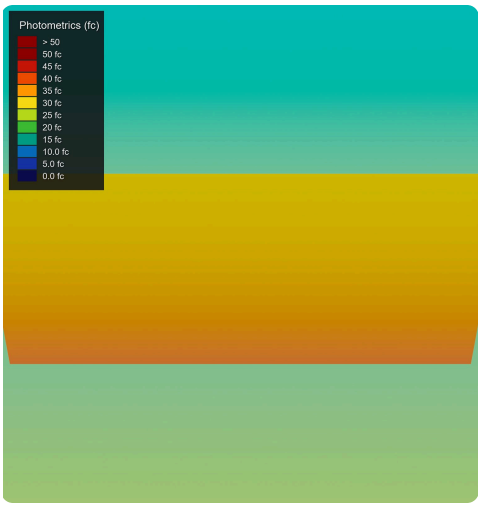

DELIVERY

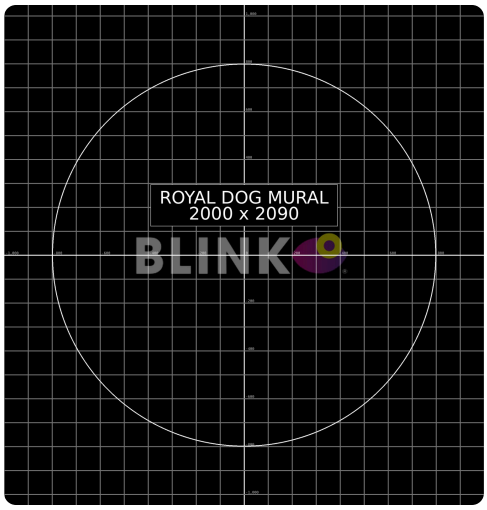

PJ-1.1.1

Epson Pro L25000 · ELPLW08

PLACEMENT

ORIENTATION
Landscape

SURFACE
Left

LENS TO GROUND
2'-0"

THROW DISTANCE
49'-0"

ANGLE
26.5°

FOCUS
High

OPTICS

EST. THROW RATIO 1.10 : 1

0.86 — 1.21

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL 0%

-60% — 0 — +60%

HORIZONTAL 0%

-18% — 0 — +18%

PJ-1.1.2

Epson Pro L25000 · ELPLW08

PLACEMENT

ORIENTATION
Landscape

SURFACE
Left

LENS TO GROUND
2'-0"

THROW DISTANCE
49'-0"

ANGLE
13°

FOCUS
Low

OPTICS

EST. THROW RATIO 1.10 : 1

0.86 — 1.21

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL 0%

-60% — 0 — +60%

HORIZONTAL 0%

-18% — 0 — +18%

RIGHT

DIMENSIONS

BUILDING	
WIDTH	41'-0"
HEIGHT	26'-0"
FROM GROUND	13'-0"

COVERAGE	
WIDTH	43'-7"
HEIGHT	27'-3"
AVG LUMINANCE	13 fc

RESOLUTION	
RESOLUTION	1786 × 1260 px

ROUGH COVERAGE

OVERLAP ZONES

LUMINANCE HEATMAP

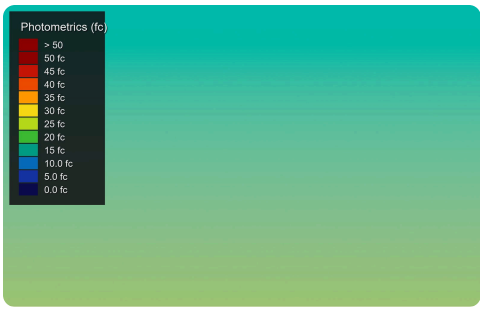

DELIVERY

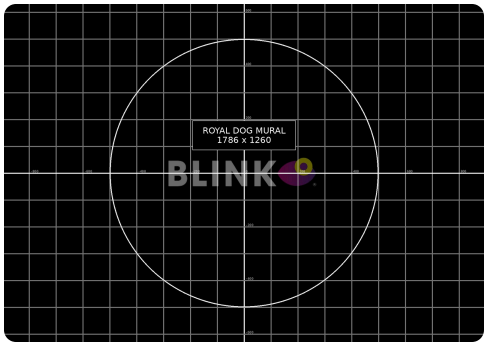

PROJECTORS

PJ-1.1.3

Epson Pro L25000 · ELPLW05

PLACEMENT

ORIENTATION
Landscape

SURFACE
Right

LENS TO GROUND
5'-0"

THROW DISTANCE
37'-0"

ANGLE
12.5°

OPTICS

EST. THROW RATIO **0.80 : 1**

0.77 — 1.07

RESOLUTION
1920x1200

LENS SHIFT

VERTICAL **0%**

-24% — 0 — +24%

HORIZONTAL **0%**

-10% — 0 — +10%

NOTES

- Includes a 5% "Bleed" on all sides to ensure full coverage of the building surfaces. Please fill content to the full bleed dimensions to avoid any gaps in coverage.

VERSION HISTORY

VERSION 1 04/25/2026 *Ted Brown*

Initial version

VERSION 2 04/25/2026 *Ted Brown*

Updated projector coverage to 0 out lens shift - no delivery changes